


newline

Connect. Create. Collaborate.

TRU TOUCH VN Series

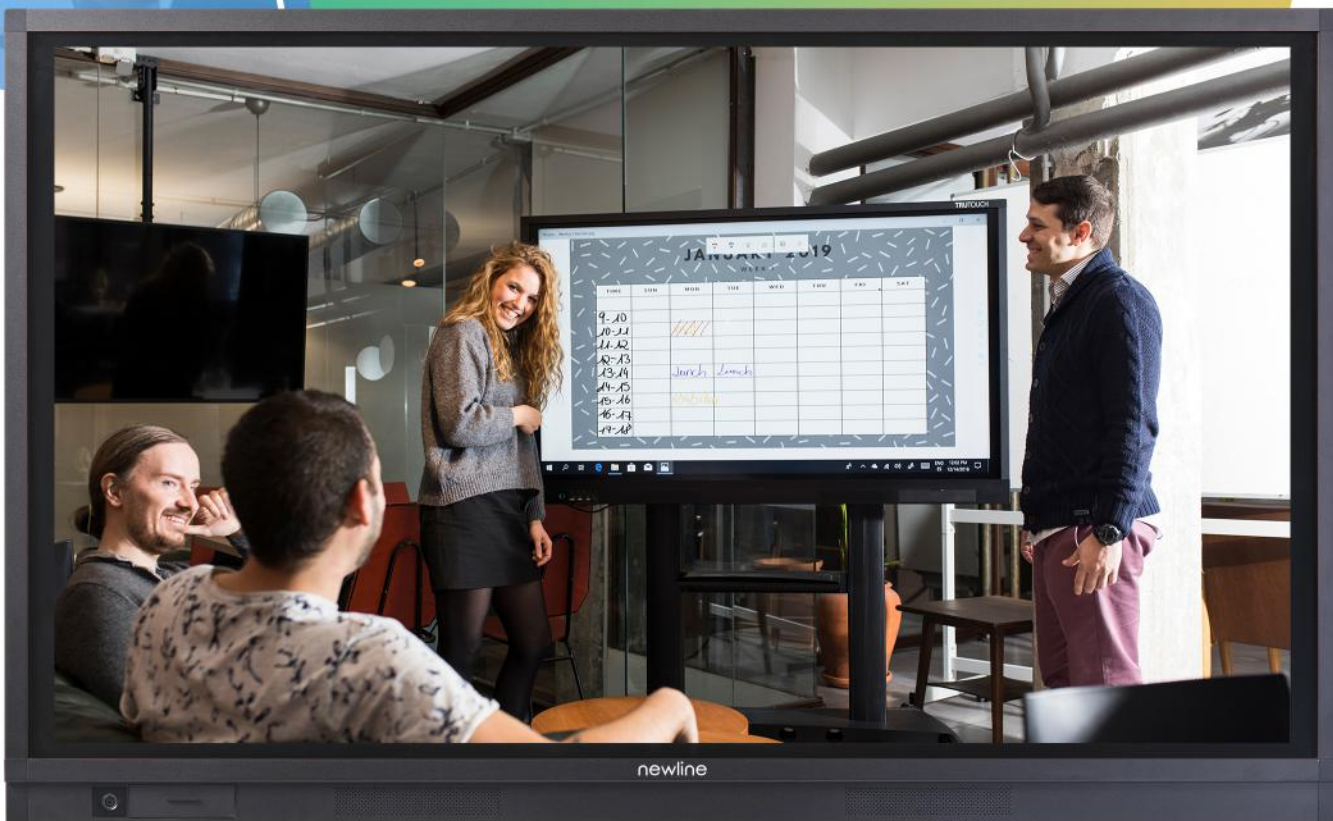

INDUSTRY FIRST OPTICAL BONDING TECHNOLOGY


CAST BROADCAST DISPLAY MANAGEMENT



20-Point Touch
Simultaneous Interaction



Front Speakers
High-Quality Sound

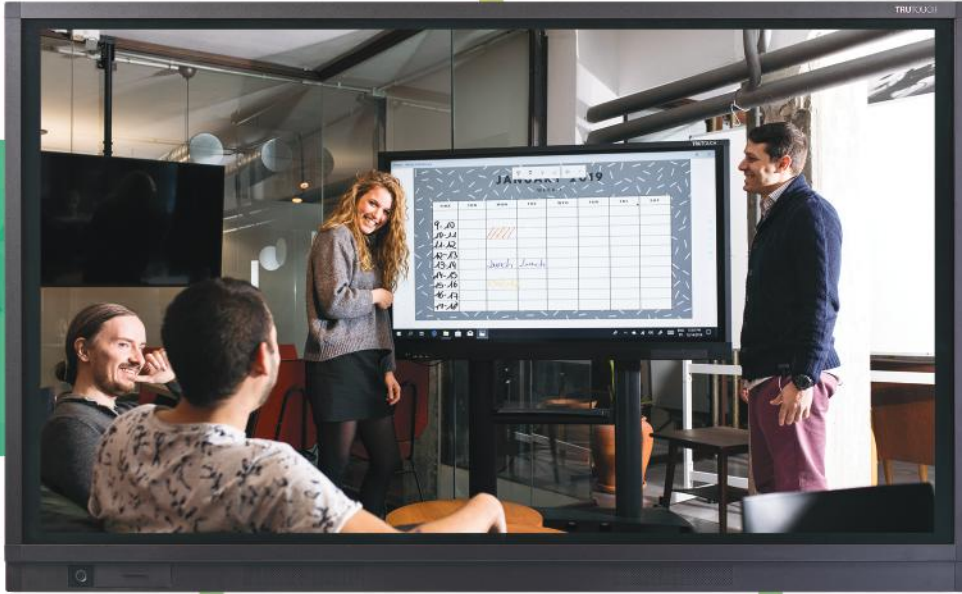

On-Board PC
Optional OPS PC



Diverse Connectivity
Multi-Interface Support



BYOD Enabling
Cast & Share Screens

THE SMOOTHEST, MOST INTUITIVE TOUCH EXPERIENCE

Communication and collaboration made easy for all teams



Bring your
own device



Optically bonded
4K display to
redefine clarity




Ultra-wide 178°
viewing angle

65"

75"

86"

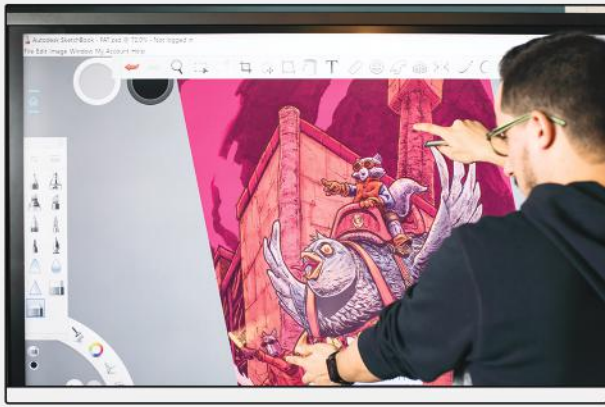


UNPARALLELED WRITING EXPERIENCE

Object Recognition and advanced IR touch technology give you the smoothest, most intuitive and responsive writing experience available. Write with a thin pen, erase with your palm, and set memory functions. Collaborate easily and comfortably without limitations

OPTICAL BONDING TECHNOLOGY

Ultra-wide 178° viewing angle for clear, robust images no matter where you sit in the room.

Optical bonding brings an improved visual experience with accurate touch and a sturdier display. The benefits are endless.

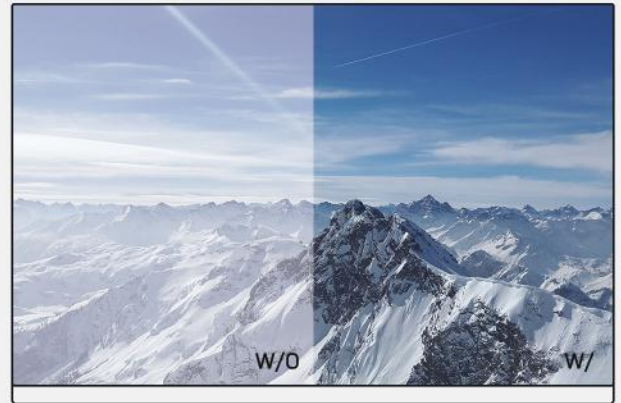

TRULY ENGAGING COLLABORATION

A stunning, multi-functional display to make your meetings and presentations more engaging than ever. The VN Series enables BYOD so you can share and broadcast personal device screens wirelessly and hassle-free. Enhance productivity and maximize efficiency with the VN Series.


APPLICATIONS



MEETING ROOM



HIGHER EDUCATION

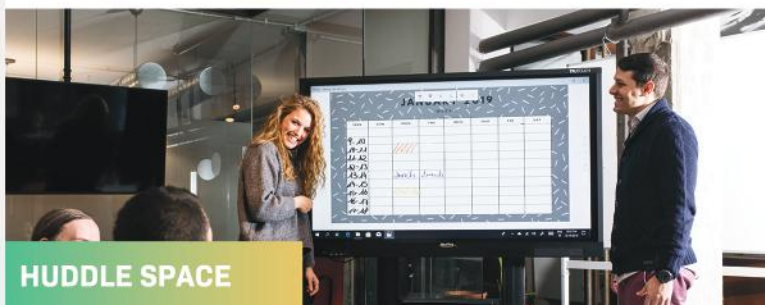

HUDDLE SPACE



TRAINING

PRODUCT SPECIFICATION

MODEL NAME	TT-6518VN	TT-7518VN	TT-8618VN
DISPLAY			
BACKLIGHT	LED	LED	LED
DISPLAY AREA	1428.5*803.5MM	1650 * 973MM	1895.04*1066 MM
ACTIVE SCREEN SIZE	65 INCHES	75 INCHES	86 INCHES
DISPLAY RATIO	16:9	16:9	16:9
RESOLUTION	3840 HORIZ. BY 2160 VERT. PIXELS	3840 HORIZ. BY 2160 VERT. PIXELS	3840 HORIZ. BY 2160 VERT. PIXELS
DISPLAY COLORS	10-BIT, 1.07 BILLION COLORS	10-BIT, 1.07 BILLION COLORS	10-BIT, 1.07 BILLION COLORS
BRIGHTNESS	370NIT	370NIT	370NIT
CONTRAST	4000:1	4000:1	4000:1
RESPONSE TIME	8MS	8MS	8MS
VIEWING ANGLE	178°	178°	178°
LIFE TIME	≥30000HRS	≥30000HRS	≥30000HRS
SPEAKER			
SPEAKER POSITION	FORWARD	FORWARD	FORWARD
MAX.POWER OUTPUT	2 X15W	2 X15W	2 X15W
ELECTRICAL			
POWER CONSUMPTION	MAXIMUM <220W STANDBY MODE ≤0.5W	MAXIMUM <300W STANDBY MODE ≤0.5W	MAXIMUM <450W STANDBY MODE ≤0.5W
WORKING VOLTAGE	AC 100-240V, 50/60HZ	AC 100-240V, 50/60HZ	AC 100-240V, 50/60HZ
TOUCH			
TOUCH SURFACE	OPTICAL BONDING , ANTI-GLARE TEMPERED GLASS + ANTI-FINGER PRINT	OPTICAL BONDING , ANTI-GLARE TEMPERED GLASS + ANTI-FINGER PRINT	OPTICAL BONDING , ANTI-GLARE TEMPERED GLASS + ANTI-FINGER PRINT
TRANSPARENCY	88%	88%	88%
SURFACE HARDNESS	7H	7H	7H
HID SUPPORT	HID	HID	HID
TOUCH POINTS	ANDROID 10 TOUCH POINTS WINDOWS 20 TOUCH POINTS	ANDROID 10 TOUCH POINTS WINDOWS 20 TOUCH POINTS	ANDROID 10 TOUCH POINTS WINDOWS 20 TOUCH POINTS
WRITING TOOLS	STYLUS, FINGER, ERASER	STYLUS, FINGER, ERASER	STYLUS, FINGER, ERASER
SCAN SPEED	250HZ	250HZ	250HZ
COMMUNICATION INTERFACE	USB-A	USB-A	USB-A
TRANSMISSION RANGE	5M	5M	5M
TRANSPORTATION/STORAGE			
STORAGE TEMPERATURE/HUMIDITY	-20°C--60°C/20--80%RH(NON COAGULATION)	-20°C--60°C/20--80%RH(NON COAGULATION)	-20°C--60°C/20--80%RH(NON COAGULATION)
WORKING TEMPERATURE/HUMIDITY	0°C-40°C/20--80%RH(NON COAGULATION)	0°C-40°C/20--80%RH(NON COAGULATION)	0°C-40°C/20--80%RH(NON COAGULATION)
MOUNTING (OPTIONAL)	WALL-MOUNTED / FLOOR STAND	WALL-MOUNTED / FLOOR STAND	WALL-MOUNTED / FLOOR STAND
OUTLINE DIMENSION	1546X944X89 MM	1771X1071X108 MM	2018X1211X104 MM
PACKING DIMENSION	1720X1085X275 MM	1918X1190X275 MM	2155X1320X310 MM
NET WEIGHT	39+/-1KG	51+/- 1KG	65+/-1.5KG
GROSS WEIGHT	58+/-2KG	68+/-2KG	88+/-2KG
PORTS			
FRONT INTERFACE INPUTS	HDMI 1.4(4K@30HZ) X 1, USB(TOUCH) X 1, USB(PUBLIC) X 2	HDMI 1.4(4K@30HZ) X 1, USB(TOUCH) X 1, USB(PUBLIC) X 2	HDMI 1.4(4K@30HZ) X 1, USB(TOUCH) X 1, USB(PUBLIC) X 2
AV INPUTS	HDMI 2.0/1.4 (4K@60HZ*2, 4K@30HZ*1) X 3, DP(4K@60HZ) X 1, USB(TOUCH) X 4	HDMI 2.0/1.4 (4K@60HZ*2, 4K@30HZ*1) X 3, DP(4K@60HZ) X 1, USB(TOUCH) X 4	HDMI 2.0/1.4 (4K@60HZ*2, 4K@30HZ*1) X 3, DP(4K@60HZ) X 1, USB(TOUCH) X 4
AV OUTPUTS	HDMI OUT (SUPPORT 4K@60HZ, 1920X1080@60HZ, 720X480@60HZ)X 1, LINE OUT X1, SPDIF OUT	HDMI OUT (SUPPORT 4K@60HZ, 1920X1080@60HZ, 720X480@60HZ)X 1, LINE OUT X1, SPDIF OUT	HDMI OUT (SUPPORT 4K@60HZ, 1920X1080@60HZ, 720X480@60HZ)X 1, LINE OUT X1, SPDIF OUT
OTHER	USB2.0(PUBLIC) X 1, USB 2.0 EMBEDDED X 1,RS232 X 1, RJ45 X 2, USB3.0(PUBLIC) X 1,OPS SLOTS(4K@60HZ),DC 5V-2A OUT	USB2.0(PUBLIC) X 1, USB 2.0 EMBEDDED X 1,RS232 X 1, RJ45 X 2, USB3.0(PUBLIC) X 1,OPS SLOTS(4K@60HZ),DC 5V-2A OUT	USB2.0(PUBLIC) X 1, USB 2.0 EMBEDDED X 1,RS232 X 1, RJ45 X 2, USB3.0(PUBLIC) X 1,OPS SLOTS(4K@60HZ),DC 5V-2A OUT
SPECIALITY			
INTELLIGENT THERMO PROTECTOR	YES	YES	YES
BUILD IN WIFI	2.4G/5G (ONLY AVAILBLE WITH CE/FCC REGULATRION COUNTRY)	2.4G/5G (ONLY AVAILBLE WITH CE/FCC REGULATRION COUNTRY)	2.4G/5G (ONLY AVAILBLE WITH CE/FCC REGULATRION COUNTRY)

BUILT-IN APPS

Everything you need to schedule meetings, manage e-mails, save and open files with the cloud and work on documents, all with Newline's built-in apps. Collaborate locally and remotely, easily.



Office Viewer

Business Calendar

Calculator

E-mail

File Commander

Gallery

newline
Connect. Create. Collaborate.

HiteVision

CHENNAI

Room No. 202, 203, 211
No.37, Workafella, TTK Road, Alwarpet,
Chennai-600018, Tamil Nadu

GUJARAT

104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thalthej,
Ahmedabad 380015, Gujarat

DELHI

Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA

RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010

MUMBAI

1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in